


DATA SHEET

**MONOTEX L 175 BG**

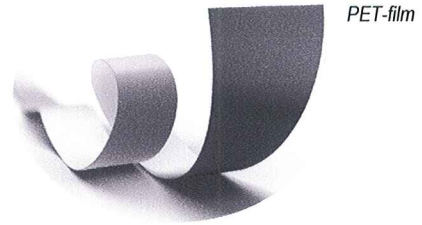

PROPERTY		UNITY		TOLERANCE	STANDARD
Weight		g/m <sup>2</sup>	<b>254</b>	± 10 %	ISO 4591
Thickness		µm	<b>185</b>	± 10 %	ISO 4593:1993
Smoothness (Bekk)	1.Side	s	<b>20</b>	min.	ISO 5627
	2.Side		<b>20</b>		
Heat resistance		°C	<b>- 40 to + 180, 30 Min.</b>		
Opacity		%	<b>94</b>	min	ISO 2471
Tensile strength	along	MPa	<b>80</b>	min.	ISO 527-1
	cross		<b>100</b>		
Weight of coating		g/m <sup>2</sup>	<b>5 each Side</b>	± 1	Féron intern

This product features a good water resistance without mechanical load.

**Printability:**

Flexo, Offset, Silk screen printing, thermaltransfer printing, laser printing.

The product must be stored at standard climate conditions (23 °C / 50 % relative humidity).

Unless otherwise agreed upon, the suitability of our products supplied for the specific production process or application is not a term of the sales contract. The customer alone is responsible for testing our products with regard to his particular application.

The above information corresponds to our current state of knowledge. Our products are subject to modification when mandatory caused by e.g. adjustment of legal requirements or raw material modifications of our suppliers.