

MM Liner

Code no. 44103




Last update of 12/2015

MML / Liner

Mill

FS-Karton GmbH, Germany

1 Board structure

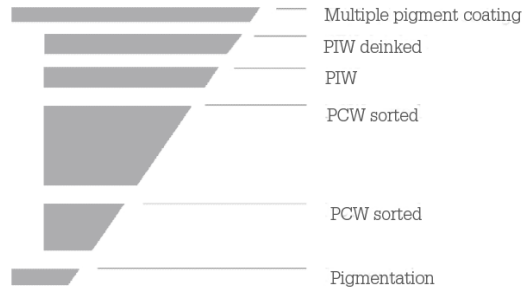

Fibre materials	% of board	+/- in % of board
PIW	15	10
PCW	70	10
Coating	15	10
Total	100	

PIW = Post Industrial White Recycled Fibres
PCW = Post Consumer White and Grey Recycled Fibres

2 Technical specifications

Grammage	Caliper	Burst pressure	SCT	Smoothness PPS	Gloss 75°	Brightness
g/m ²	µm	kPa	cd	µm	%	%
210	245	400	2,9	< 2,5	> 45	80
230	270	420	3,1	< 2,5	> 45	80

Properties	Value	Tolerances	Testing standard
Grammage		+/- 2%	EN ISO 536
Caliper		+/- 5%	EN 20534
Burst pressure		-10%	ISO 2759
SCT		- 0,3	ISO 9895
Smoothness PPS			ISO 8791-4
Gloss 75°			ISO 8254
Brightness (Top)	Elrepho	- 1	ISO 2470-2
Testing climate	23°C	+/- 1°C	EN ISO 186
	50%	+/- 2% rh	

For Liner only and not for folding carton applications.

Certified according to FSC IC-COC-100129-D, FSC IC-CW-100129-D, PEFC IC-PEFC-1128-D and Halal